

Claudius Peters PACPAL

Bag Loader

Our advantages

- Bag loading machines in state-of-the-art design
- Compact and modular machine concept
- Optimized energy consumption with most innovative drive technology
- Capacity up to 3000 bags/hour



Operational


- Suitable for the handling of most common bags and layer types
- Semi automatic type range to load on most common trucks and other vehicles
- Low degree of maintenance = high degree of availability
- Easy interactive operation and human machine interface (HMI)

Production basics

- Capable for cement and other building materials
- Bag weight from 25 - 50 kg
- Traveling range up to 12 m
- Bag types: Paper/PP/PE valve, FFS and others
- Individual solutions with conveying part (bulk or bag) upon request




Packing systems for
Cement, Gypsum
and other building
materials

Bag Loader

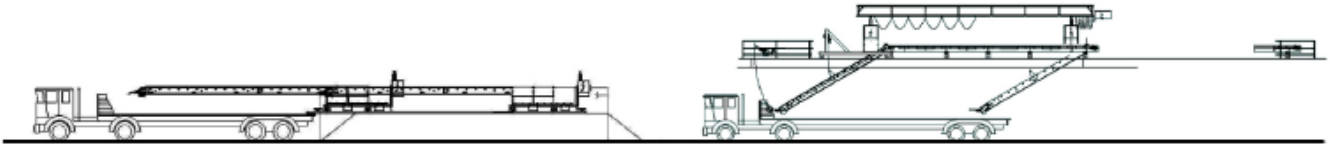

RLGC

RLTO

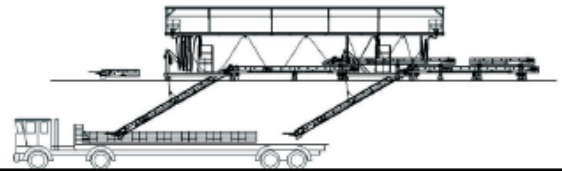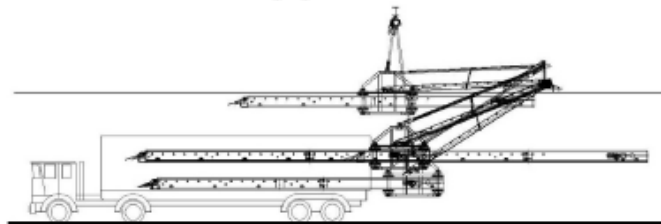

RLTC

RLTO-T

Main voltage:	380 up to 690 V 3 phase
Frequency:	50 or 60 Hz
Control voltage:	24 V DC
Power connecting value:	RLGC 3,3 kW (main machine) RLTC 6,7 kW (main machine) RLTO 7,1 kW (main machine)
Motor protection class:	IP54 or higher
PLC types:	Siemens (Standard), Rockwell, others on request

**Bulk Handling,
Packing, Palletizing
and Dispatch from
one Source**



Claudius Peters Projects GmbH

Schanzenstraße 40 | D-21614 Buxtehude | Germany

Tel: +49 (0) 4161 706-0 | Fax: +49 (0) 4161 706-270

projects@claudiuspeters.com

www.claudiuspeters.com

Issue 09-2021: The information within this brochure is deemed to be correct at the time of going to press. Due to the policy of continued improvement, we reserve the right to change any specification without prior notice

ERRORS & MISSIONS EXCEPTED