

Claudius Peters PACPAL

Palletizer PSU



Our advantages


- Low level palletizer in “state of the art” design
- Modular machine concept for various requirements
- Gentle and careful handling of the bagged products
- Compact and precise stack formation for consumers convenience
- Optimized energy consumption with most innovative drive technology
- Main machine without pneumatic drives
- Depending on bag size and layer type up to 1200 bags/hour

Operational

- Suitable for the most common layer types
- Low degree of maintenance = high degree of availability
- High lifetime
- Easy interactive operation and human machine interface (HMI)

Production basics



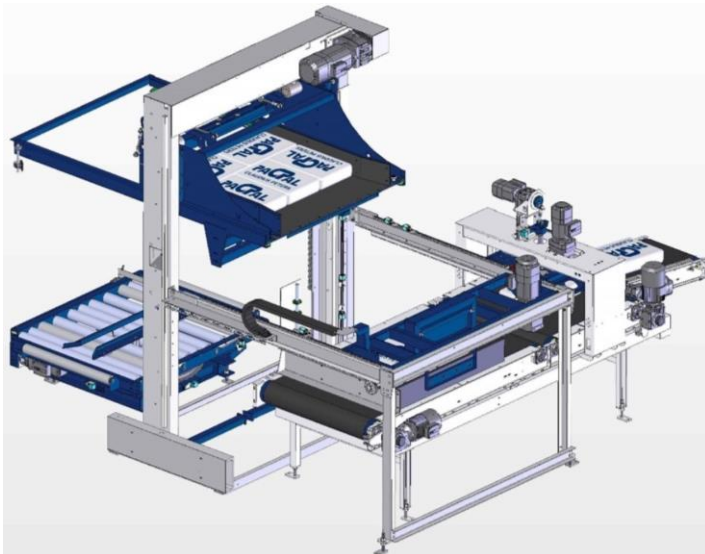



- Capable for building, chemical and food industry
- Bag weight from 5 up to 50 kg
- Bag types: Paper/PP/PE valve, FFS and others
- Pallet types: All industrial pallets









Proven Technology
Industry Palletizer
Efficient and Reliable

Palletizer PSU

Technical data Maschine capacities

						
Layer type	3-bag	4-bag	4-bag	5-bag	6-bag	6-bag
Bags/h	600	800	900	900	800	900
Bag size [mm]	800x400	650x450	600x400	600x400	600x300	600x300

						
Layer type	6-bag	7-bag	7-bag	8-bag	8-bag	10-bag
Bags/h	900	950	1050	1100	1000	1200
Bag size [mm]	600x400	400x300	500x330	450x300	450x300	400x300

Main voltage:	380 up to 690 V 3 phase
Frequency:	50 or 60 Hz
Control voltage:	24 V DC
Power connecting value:	15 kW
Motor protection class:	IP54 or higher
Pneumatic connection:	6 bar
	(Not required for main machine)
PLC types:	Siemens (Standard), Rockwell, others on request

**Bulk Handling,
Packing, Palletizing
and Dispatch
form one Source**

Claudius Peters Projects GmbH
Schanzenstraße 40 | D-21614 Buxtehude | Germany
Tel: +49 (0) 4161 706-0 | Fax: +49 (0) 4161 706-270
projects@claudiuspeters.com

www.claudiuspeters.com

Issue 09-2021: The information within this brochure is deemed to be correct at the time of going to press. Due to the policy of continued improvement, we reserve the right to change any specification without prior notice

ERRORS & MISSIONS EXCEPTED

